



ELEVATION OF
REAR VIEW OF WARNING SIGN

ELEVATION OF
SIDE VIEW OF WARNING SIGN

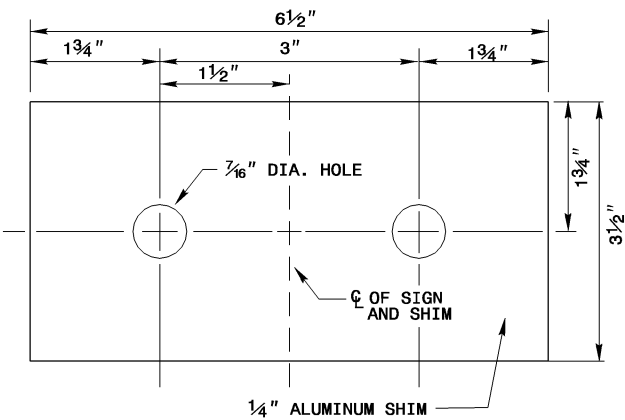

ALUMINUM SHIM DETAIL

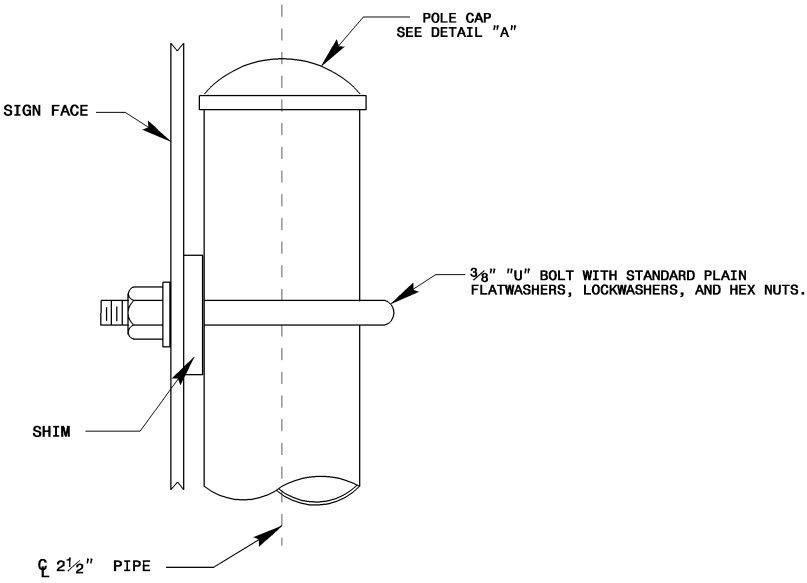

PIPE SUPPORT

- NOTES:
1. FURNISH ONE SET OF SIGN SUPPORTS FOR EACH SIGN.
 2. FURNISH ALL MOUNTING HARDWARE.
 3. THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION WILL FURNISH SIGNS.
 4. USE ASTM A-36 STEEL GALVANIZED "U" BOLTS AND NUTS IN ACCORDANCE WITH ASTM A-153.
 5. USE ASTM A-36 ANCHOR BOLTS, GALVANIZED IN ACCORDANCE WITH ASTM A-153. OVERALL LENGTH OF ANCHOR BOLTS IS 27". ANCHOR BOLT PROJECTION, EMBEDMENT, AND HOOK TO BE AS SHOWN ON PLANS.
OR,
USE 5/8" x 7-5/8" DRILLED ADHESIVE ANCHOR GALVANIZED TO ASTM A-153. PROVIDE EACH ANCHOR WITH TWO (2) NUTS, ONE (1) FLAT WASHER, AND ONE (1) LOCK WASHER.